BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE

Name of work: Estimate for Providing CC Road and Drains at Behind ACP Office, Basavalingappanagara in ward No 05 Byatarayanapura Sub Division

			Estimate Cost Rs.					3000000.00	
Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
1	KSRB 2-1.1: Earth work in surface excavation in ordinary soil for leveling and lowering the ground manually (other than foundation of buildings, culverts, road drains and trenches of pipe line and cables) and removing the excavated stuff to a distance not exceeding 50m and lift upto 1.5m, excavated surface leveled and neatly dressed, disposed earth to be leveled after breaking of clods and neatly dressed as per specifications, Specification No KBS 2.1(a) / 2.3.1,P. No. 5/ Item No. 2.1/ PWD SR 2013-14	cum							
	For Road Surface								
	Shamiulla House Road and Cross Roads		4	50.00	5.00	0.20	200.00		
			4	24.00	5.00	0.20	96.00	✓	✓
							200.00	126.36	**25272.00**
	Basic Rate	117.00							
	Area Weightage @ 8%	9.36							
	Total	**126.36**	✓						
3	KSRB 2-2.1 : earth work excavation for foundation of buildings, culverts water supply, sanitary line and electrical conduits either in pits or in trenches 1.5m and above in width, in **Hard soil** not exceeding 1.5m, in depth including dressing the bottom and sides of pits and trenches, stacking the excavated soil clear from edges of excavation with lead upto 50m, after breaking of clods complete as per specifications, specification, No, KBS 2.1(a) / 2.3.5, No. 5/ Item No. 2.4/ PWD SR 2013-14	Cum							
	For Culverts		6	6.00	1.85	1.05	69.93		
	Shamiulla House Road and Cross Roads		4X2	50.00	0.75	0.75	225.00		
			4X2	24.00	0.75	0.75	108.00		
								✓	✓
							294.93	227.88	**67209.00**
	Basic Rate	211.00							
	Area Weightage @ 8%	16.88							
	Total	**227.88**	✓						
6	Providing granite slabs of selected quality roughly dressed and fixed in cement mortar(1:6) including fixing curing etc, complete -do- 7.5 cms thick Page No. 28/ Item No. 5.31.1/ PWD SR 2013-14	**Sqm**							
	Shamiulla House Road and Cross Roads		4X2	50.00	1.65		660.00		
			4X2	24.00	1.65		316.80	✓	✓ ✓
							976.80	343.44	**335472.00**
	Basic Rate	318.00							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
	Area Weightage @ 8%	25.44							
	Total	**343.44**							
7	KSRB-4-1.3 : Providing and laying in position **plain cement concrete of mix M 7.5** withOPC cement at 180kgs, with 40mm and down size graded granite metal coarse aggregates @0.892cum and fine aggregates @0.57cum machine mixed, concrete laid in layers not, exceeding 15cms, thick, well compacted, in foundation and plinth, including cost of all materials, labour, HOM of machinery, curing complete as per specifications. Specification No. KBS 4.1,4.2, No. 12/ Item No. 4.3/ PWD SR 2013-14	**Cum**							
	For Culverts		6	6.00	1.85	0.15	9.99		
	Shamiulla House Road and Cross Roads		4	50.00	5.00	0.15	150.00		
			4	24.00	5.00	0.15	72.00		
							231.99	4290.84	**995432.00**
	Basic Rate	3973.00							
	Area Weightage @ 8%	317.84							
	Total	**4290.84**							
8	KSRB 5.2.3 Providing and constructing granite / trap / basalt Size stone masonry **in foundation** with cement mortar 1:6, stone hammerd dressed in courses not less than 20 cms high, bond stones at two m. apart in each course including cost of materials, labour, curing complete as per specifications.KBS 5.1.13 Page No. 25/ Item No. 5.6/ PWD SR 2013-14	cum							
	For Culverts		6X2	6.00	0.60	0.45	19.44		
							19.44	3549.96	**69011.00**
	Basic Rate	3287.00							
	Area Weightage @ 8%	262.96							
	Total	**3549.96**							
9	KSRB 5.3-3 Providing and constructing granite / trap / basalt size stone masonry **in basement** with cement mortar 1:6, edges of stones chistle dressed in courses not less than 15 cms high, bond stones at two m. apart in each course including cost of materials, labour, curing complete as per specifications.KBS 5-1.13 Page No. 26/ Item No. 5.9/ PWD SR 2013-14	**Sqm**							
	For Culverts		6X2	6.00	0.50	0.45	16.20		
							16.20	4227.12	68479.00
	Basic Rate	3914.00							
	Area Weightage @ 8%	313.12							
	Total	**4227.12**							
10	KSRB 4-6.7 : Providing and removing centering, shuttering, strutting, propping etc., and removal of form work for sides and soffits of beams, beam haunchings, cantilever girders, bressumers and lintels not exceeding 1 m in depth including cost of all materials, labour complete as per specifications. Specification NO KBS 4.6.2 Page No. 17/ Item No. 4.34/ PWD SR 2013-14	**Sqm**							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
	For Culverts		6	6.00	0.60		21.60		
	For Sides		6X2	6.00	0.23		16.56		
			6X2	1.65	0.23		4.55		
	Shamiulla House Road and Cross Roads		4	50.00		0.10	20.00		
			4	24.00		0.10	9.60	✓	✓
							72.31	**244.08**	**17650.00**
	Basic Rate	**226.00**	✓						
	Area Weightage @ 8%	18.08	✓						
	Total	**244.08**	✓						
11	KSRB 4-1.7 : : Providing and laying in position plain cement concrete of mix **M10** withOPC cement @ 220kgs, with 20mm and down size graded granite metal coarse aggregates @0.84cum and fine aggregates @0.56cum machine mixed, concrete laid in layers not, exceeding 15cms, thick, well compacted, in foundation and plinth, including cost of all materials, labour, HOM of machinery, curing complete as per specifications. Specification No. KBS *4.1,4.2/P No. 13/ Item No. 4.7/ PWD SR 2013-14*	***cum***							
	For Culverts		*6X2*	*6.00*	*0.45*	*0.10*	*3.24*		
	Vent Bed		6	6.00	0.60	0.10	2.16	✓	✓
							5.40	4737.96	**25585.00**
	Basic Rate	4387.00	✓						
	Area Weightage @ 8%	350.96	✓						
	Total	**4737.96**	✓						
12	KSRB 4.2.2 : Providing and laying in position plain cement concrete of mix **M20** withOPC cement @ 320kgs, with 20mm and down size graded granite metal coarse aggregates @0.878cum and fine aggregates @0.459cum with superplastesisre @ 3lts conforming to IS9103-1999Reffirmed machine mixed exceeding 15cms thick, vibrated for all works in foundation plinth and ground floor level for roof slabs, staircase, lintels, retaining walls, return walls, walls(any thickness) including attached plasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, coping, bed blocks, anchor blocks, plain window cills, fillets etc, including cost of all materials, labour HOM of machinery, curing complete as per specifications. Specification No. KBS 4.1,4.6, **No. KBS 4.1,4.6, No. 13/ Item No. 4.11/ PWD SR 2013-14**	**Cum**							
	For Culverts		6	6.00	1.65	0.23	13.66	✓	✓
							13.66	5639.76	**77050.00**
	Basic Rate	5222.00	✓						
	Area Weightage @ 8%	417.76	✓						
	Total	**5639.76**	✓						

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
13	KSRB 4.9.2:providing T.M.T steel reinforcement for R.C.C work including straightening, cutting, bending, hooking, placing in position, lapping and / or welding wherever required, tying with binding wire and anchoring to the adjoining members wherever necessary complete as per design (laps, hooks and wastage shall not be measured and paid) cost pf materials, labour, HOM of machinery complete as per specifications.Specification No. KBS 4.6.3 Page No. 19/ Item No. 4.46.1/ PWD SR 2013-14	Qtl							
	.90 Qtll/Cum		0.90	13.66			**12.30**	7380.72	**90752.00**
	Basic Rate	6834.00							
	Area Weightage @ 8%	546.72							
	Total	**7380.72**							
14	KSRB 15.1.3: Providing **FLush pointing** to coursed stone masonry with cement mortar 1:3, 20 mm deep, after raking joints to depth of 20mm nicely lining, including cost of materials, labour, curing complete as per specifications. Page No. 122/ Item No. 15.1/ PWD SR 2013-14	Sqm							
	For Culverts		6X2	6.00		0.85	**61.20**	79.92	**4891.00**
	Basic Rate	74.00							
	Area Weightage @ 8%	5.92							
	Total	**79.92**							
4	Providing and laying cement concrete using 20mm and down size granite jelly of ready mixed concrete (RMC)for R.C.C works laid in 15cms thick layers and well compacted vibrating, curing, finishing with necessary cement mortar, form works and scaffoldings to withstand pumping of concrete, with all lead and lifts etc., complete (exclusive of cost of steel and fabrication charges.) Ready mixed Cement concrete M-20 for raft foundation, column footing, main and secondary beams. Page No. 19/ Item No. 4.48.1/ PWD SR 2013-14	Cum							
	Shamiulla House Road and Cross Roads		4	50.00	5.00	0.10	100.00		
			4	24.00	5.00	0.10	48.00		
							148.00	6464.88	**956802.00**
	Basic Rate	5986.00							
	Area Weightage @ 8%	478.88							
	Total	**6464.88**							
5	KSRRB M2600-3: (ii) Providing & fixing 20 mm thick compressible fibre board in expansion joint complete as per drawing & technical specification complete as per specifications, MORTH specification No. 2605, No. 248/ Item No. 31.3 PWD SR 2013-14	M							
	Ravi's House Road		67	5.00			335.00		
			33	5.00			165.00		
							500.00	137.16	**68580.00**

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
	Basic Rate	127.00							
	Area Weightage @ 8%	10.16							
	Total	**137.16**							
6	Vaccum De- writing with vaccum pump and suction mat and compaction with skin flater clubbed with floatiog disc including cost of generator, HOM of machinery Sereed Vibratory Power Floaterblade and diisc etc. with all lead and lift No. 187/ Item No. 22.7/ PWD SR 2013-14	Sqm							
	Shamiulla House Road and Cross Roads		4	50.00	5.00		1000.00		
			4	24.00	5.00		480.00		
							1480.00	91.80	**135864.00**
	Basic Rate	85.00							
	Area Weightage @ 8%	6.80							
	Total	**91.80**							
7	Lead for Disposal of Debris shall be payable at carage rates by Mechanical means inlcuding loading and unloading. From 0.00 to 2.00 Km (Page No.123,	Cum							
							Qty. Vide Item No. 1		**494.93**
	Average Weight of Earth 1.28 Ton/Cum						**494.93**	62.20	**30785.00**
	Basic Rate Lead Charges Upto 2.00 Kms	5.12							
	PWD SR 2010-11 (P.118/I.17.1) For loading and unloading	62.20							
	Total	**67.32**							
8	For 1% Third Party Charges								**30000.00**
9	Miscesallaneous Charges	L/S							**1166.00**
								Total	**3000000.00**

Technical Sanction for Rs. 30-00 Lakhs
Thirty Lakhs only
Superintendent Engineer
SE (BTP.Div.)
26/12/13
26/12/13
25/12/13

(Rupees Thirty Lakhs Only)

Certificate:

1 The work spot has been inspected and the work is found necessary.
2 This estimate is prepared as per PWD SR of 2012-13
3 The provisions were made in this estimate are necessary and adequate.
4 This works come under B.B.M.P. limits.

Assistant Engineer
ಸಹಾಯಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ. ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

Assistant Executive Engineer
Bruhat Bangalore Mahanagara Palike
Byatarayanapura Sub Division
ಬಿಬಿಎಂಪಿ, ಬೆಂಗಳೂರು-24

Executive Engineer
Bruhat Bangalore Mahanagara Palike
Byatarayanapura Division
24/12/2013

ADMINISTRATIVELY SANCTIONED FOR Rs. 30.00L
Rupees Thirty Lakhs only
Under Novillage Grants
Registered as EE ( ) No 9.....9....
Subject to conditions contained in
enclosed memo EE ( ) No /9/...
Dt Estimate A/Sanctioned
Add Comm (4) AS/594/13-14
dated 23.12.13 Rs 30.00L

Addl. Commissioner
(Yelahanka Zone)
BBMP, Bengaluru-92

20

proposed C.C. Road,

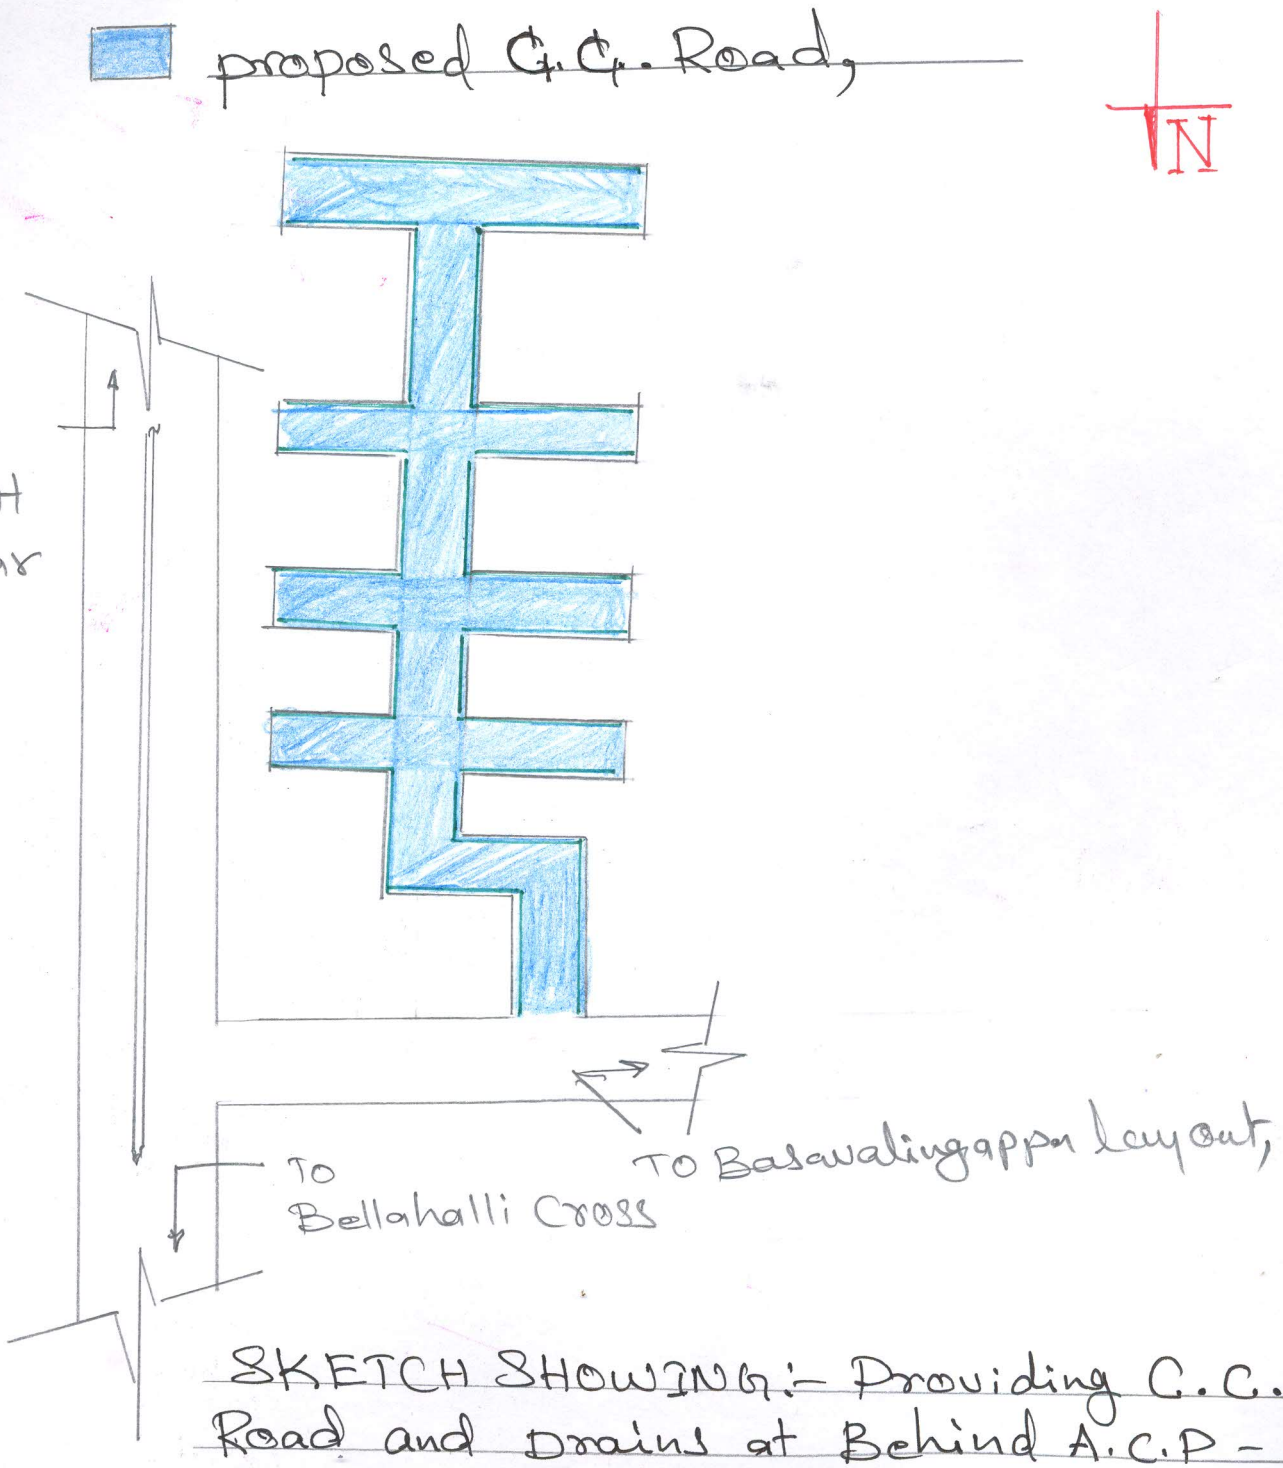

SKETCH SHOWING:- Providing C.C. Road and Drains at Behind A.C.P - Office, Basavalingappanagara in Ward No.05 Byatarayana - pura Subdivision Yelahanka Zone B.B.M.P,

ಸಹಾಯಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ. ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ
ಬಿಬಿಎಂಪಿ, ಬೆಂಗಳೂರು-24